

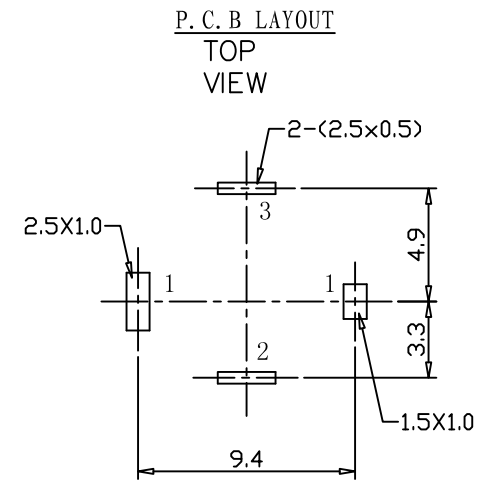
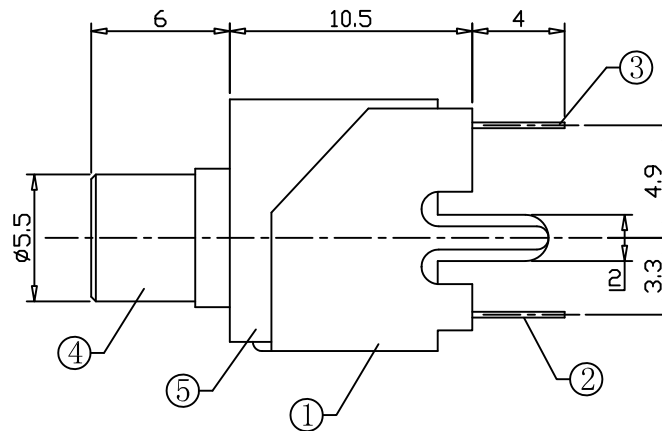


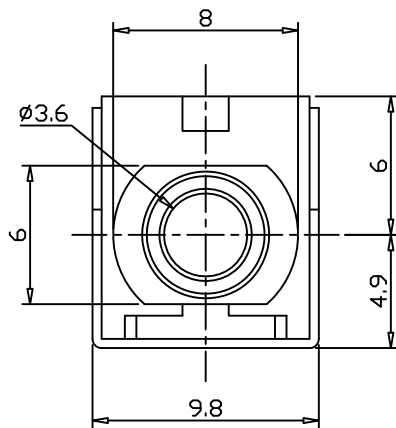

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-25N;
- 6.life test: 5,000 cycles.

5	HOUSING	1	ABS	
4	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Cu-Sn-Plating
2	CURVE PIECE	1	H62 BRASS	Sn-Sb-Plating
1	FLAT PIECE	1	IRON	Cu-Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM		TYPE:		MODEL NO:
		PHONE JACK		PJ-301B
				PAPER NO: A4
				TOLERANCE
				ANGLES
				SCALE
				VER
				3: 1
				1
DESIGNER BY:				
CHECK BY:				
APPROVED BY:				